
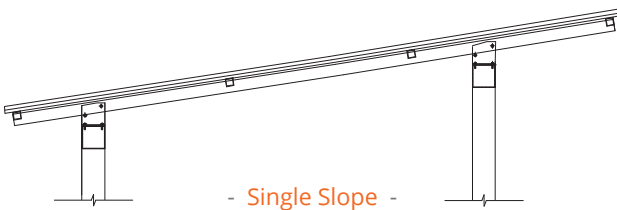


Clearspan Canopy Design Standards

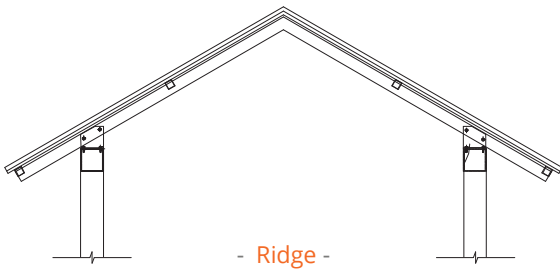

Additional Configurations

Clearspan Structural Aluminum Framing Information:

- 20 ft. maximum canopy width
- 14 ft. maximum spacing between columns across width of canopy
- 8 to 12 ft. column height
- 10 to 18 ft. column spacing along length of canopy
- 12 to 36 in. rafter overhang
- 7 to 48 in. side beam overhang

Clearspan Footing Information:

- We provide dimensions for Styrofoam block-outs (typically 14" deep) that are placed either into a concrete walkway slab or into a separate concrete footing to receive the vertical columns
- Installer secures the columns into the concrete footings using high-strength, non-shrink grout and shims as required
- See footing detail for additional information